


LINEAR MOVEMENT BALL SCREWS

Standard product line - microlinea

The mps ball screws are entirely made out of stainless steel and all components are ground. They are fitted with a double nut to adjust the play. The manufacturing process guarantees a pitch variation of less than 5 μm over the full length.

On request

- Lubricants : grease, oil, dry lubrication
- Machined ends
- Higher static load
- Multiple nuts
- Left hand thread
- Length
- Axial play (down to zero backlash)
- Special surface treatments
- Flang nut, anchor nut

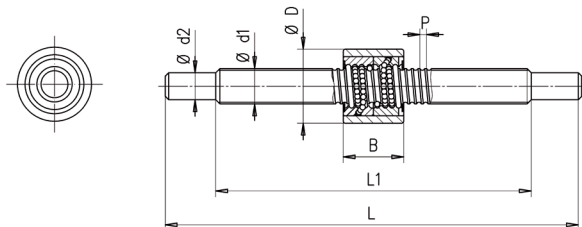

Reference	Nut		Screw						Axial load rating ISO3408-5 (N)			
	D (mm)	B (mm)	$\emptyset$ balls (mm)	d1 (mm)	P (mm)	d _s (mm)	L (mm)	L ₁ (mm)	Standard profile		High load profile	
									dyn. (Cam)	stat. (Coa)	dyn. (Cam)	stat. (Coa)
ED 410X / V404X	10	10	0.794	4.25	1.0	3	70	50	229	179	426	422
ED 513X / V501X	13	12	1.000	5.8	1.25	4	100	75	356	302	660	709
ED 616X / V601X	16	14	1.191	7.4	1.5	6	140	110	519	475	958	1114
ED 822X / V801X	22	18	1.588	10.5	2.0	8	190	150	890	887	1646	2085
ED 1028X / V1001X	28	22	2.000	13.6	2.5	10	260	210	1345	1409	2497	3313

Materials




Housing: stainless steel AISI 440C
 Ball nuts ED/ES: stainless steel AISI 440C
 Shields: stainless steel AISI 302 or AISI 303
 Balls: stainless steel AISI 440C
 Lubrication: standard: Winsor Lube L245X
 (rust protection; i.e. dipped in oil)

Example of part number definition

ED 513X/V501X double nut
 EDD 513X/V501X two double nuts
 ED 513X/V501X 4 x lead of nut thread
 ED 513X/V501X outer diameter of nut
 ED 513X/V501X nut in stainless steel
 ED 513X/V501X ground precision screw
 ED 513X/V501X 4 x lead of screw thread
 ED 513X/V501X screw drawing number
 ED 513X/V501X screw in stainless steel

Starting efficiency

(Useful information for dimensioning the system.)

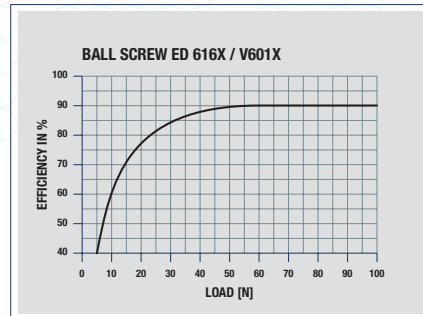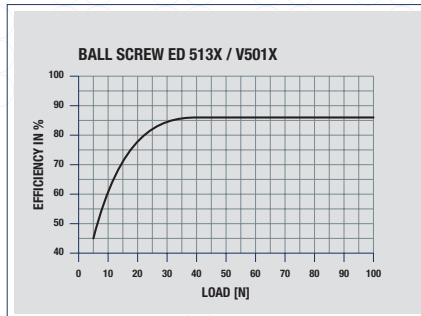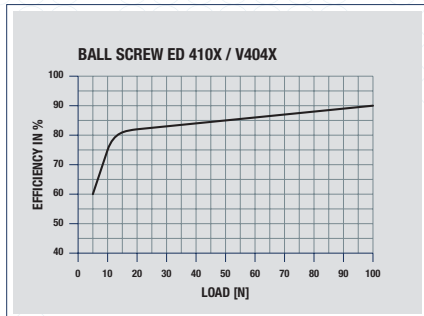

Technical Data		ED 410X / V404X	ED 513X / V501X	ED 616X / V601X	ED 822X / V801X	ED 1028 / V1001X
Tolerance of nut outer Ø	D [µm]	0 / -6	0 / -6	0 / -6	0 / -9	0 / -9
Tolerance of screw ends Ø	d ₂ [µm]	0 / -8	0 / -8	0 / -8	0 / -8	0 / -8
Max. pitch variation over total leadscrew length*	[µm]	5	5	5	5	5
Max. eccentricity nut/screw	[µm]	10	10	12	14	16
Average efficiency	[%]	80-85	80-87	80-89	81-91	83-92
Standard axial play	[µm]	0-5	0-5	0-5	0-5	0-5
Zero backlash	on request					

*Standard specification. The precision can be increased on request. **Note:** Do not remove the nut from the shaft.

Ball screw calculations – general formulas

The theoretical life expectancy is generally expressed by the total number of revolutions. The life expectancy can also be expressed in hours or in total travel distance. The fatigue life is calculated as follows:

L_m : Life expectancy in number of revolutions [rev]

L_{hm} : Life expectancy in hours [h]

C_{am} : Modified axial dynamic load [N]

F_m : Equivalent load [N], see ISO 3408-5

n_m : Equivalent rotation speed [min⁻¹], see ISO 3408-5

$$L_m = \left(\frac{C_{am}}{F_m} \right)^3 \cdot 10^6 \quad L_{hm} = \frac{L_m}{n_m \cdot 60}$$

Specifications subject to change without notice